


## 金具寸法表 ( 2 )

FP

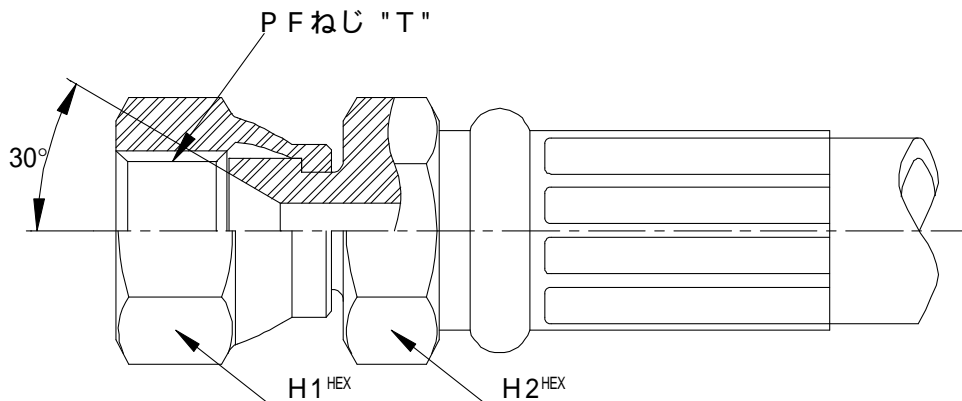

Y:1004  
B:F  
T:4

## 30°、PFネジ

ホースサイズ	ヘッドサイズ	部品番号	コード番号	Tネジ	H1 <sup>HEX</sup>	H2 <sup>HEX</sup>	CUTOFF	
04	02	02FPA-SS2W04	01302102	PF 1/8	17	17	30.5	
	04	04FPA-SS2W	01002101	PF 1/4	19	19	30.5	
		04FPA-SN2W	01302121	PF 1/4	19	19	30.5	
	06	06FPA-SS2W04	01302103	PF 3/8	22	19	32.5	
06	04	04FPA1-SS2W06	01302202	PF 1/4	19	22	30.5	
		04FPA2-SS2W06	01302203	PF 1/4	19	19	30.5	
	06	06FPA-SS2W	01002201	PF 3/8	22	22	32.5	
		06FPA-SN2W	01302221	PF 3/8	22	22	32.5	
	08	08FPA-SS2W06	01302204	PF 1/2	27	22	36.5	
08	06	06FPA-SS2W08	01302302	PF 3/8	22	27	32.5	
		08FPA-SS2W	01002301	PF 1/2	27	27	36.5	
			08FPA-SN2W	01302321	PF 1/2	27	27	36.5
			08FPA-SS2W(SUS)	01302305	PF 1/2	27	27	36.5
	08FPB-SS2W(SUS)	01302304	PF 1/2	27	27	36.5		
	12	12FPA-SS2W08	01302303	PF 3/4	36	27	40.0	
10	12	12FPB-SS2W10	01302401	PF 3/4	36	36	42.0	
12	12	12FPB-SS2W	01002501	PF 3/4	36	36	42.0	
		12FPB-SN2W	01302521	PF 3/4	36	36	42.0	
		12FPB-SS2W(SUS)	01302503	PF 3/4	36	36	42.0	
	16	16FPB-SS2W12	01302502	PF 1	41	41	43.5	
16	16	16FPB-SS2W	01002601	PF 1	41	41	48.5	
		16FPB-SN2W	01302621	PF 1	41	41	48.5	
		16FPB-SS2W(SUS)	01302503	PF 1	41	41	48.5	
20	20	20FP-SS11	01362701	PF 1-1/4	50	50	51.5	
		20FP-SS18	01362702	PF 1-1/4	50	50	58.5	
		20FP-SS21	01362703	PF 1-1/4	50	55	58.5	
		20FPA1-SS21	01362704	PF 1-1/4	50	55	59.5	
24	24	24FP-SS07	01362801	PF 1-1/2	55	55	54.5	
		24FP-SS14	01362802	PF 1-1/2	55	60	61.5	
		24FP-SS21	01362803	PF 1-1/2	55	60	61.5	
32	32	32FP-SS07	01362901	PF 2	70	70	66.0	
		32FP-SS14	01362902	PF 2	70	70	72.0	
		32FP-SS18	01362903	PF 2	70	75	72.0	